



BORN, RAISED, & BUILT IN IOWA

Richway introduces their own sub-compact articulating loader, the SCL-210. Designed for landscape, turf, agriculture, and construction professionals, the SCL-210 was created to give you a rugged machine with versatility to match. The small footprint gives easy access for tighter jobs, yet with a 24.8HP Kubota diesel engine it packs plenty of power to get done what you need. Plus with a "mini universal" style guick attach plate and 12 GPM of auxiliary hydraulic flow, the SCL-210 can utilize an enormous number of tools, giving you enormous flexibility.

LIGHT WEIGHT

VERSATILE

Works with most mini skid steer attachments

Easy to transport for DYI weekend warriors







TURF FREINDLY Low impact on lawns and landscapes

CRICHWAY

Born, Raised, & Built in Iowa





Richway Industries Ltd. www.richway.com 800-553-2404 Janesville, IA USA


Richway Industries Ltd. www.richway.com 800-553-2404 Janesville, IA USA



SCL-210 Sub-Compact Articulating Loader Series



How do you get a big impact and low impact at the same time? With Richway's SCL-210 *sub* compact loader. Its lightweight, turf friendly design coupled with it's excellent power to weight ratio and versatility means that you can have a big impact on your productivity while keeping a low impact on your jobsite.

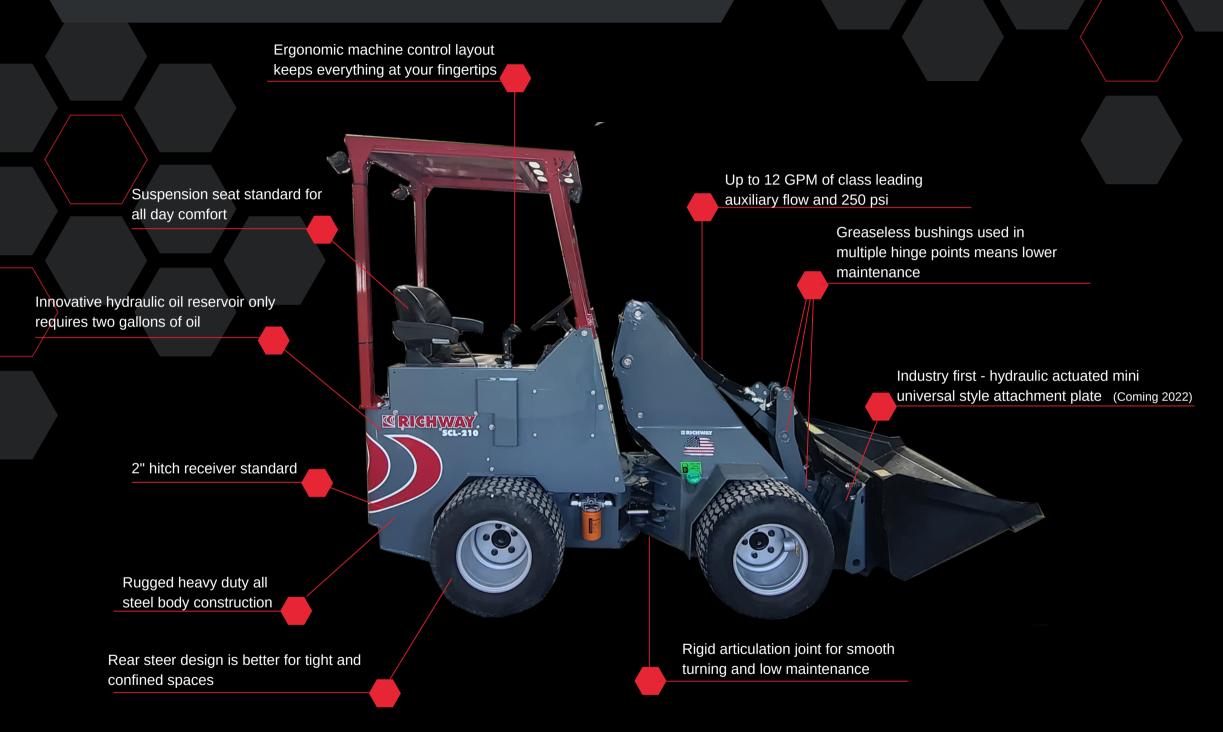

GETS ALONG EASILY

Small size and lightweight class machine allows easy transport for contractors or homeowners alike

SMOOTH OPERATOR

Articulated steering design is ideal for landscaping and turf projects minimizing wear and tear on sensitive surfaces

SMALL DOG, BIG BITE

With the ability to utilize most mini universal style attachments , and up to 2400 lbs of lifting capacity (with optional counterweights), the SCL-210 provides big capability in a small

package

SPECIFICATIONS (WITHOUT OPTIONAL COUNTER WEIGHT)

Tipping Load (Straight):	1650 lbs
Breakout Force - Lift:	1640 lbs
Breakout Force - Tilt:	2450 lbs
Maximum Hinge Pin Height:	85.3 in
Operating Weight:	3120 lbs
Articulated Tipping Weight:	1100lbs
Rated Operating Capacity:	50% of tipping load
Travel Speed:	8 mph
Engine Horsepower:	24.8HP Kubota Diesel
Cab Height:	83 in
Width without attachments:	42 in
Standard Bucket Width:	44 in
Length without Attachments:	97.4 in
Length with Standard Bucket:	124 in
Articulation Angle:	33
Minimum Ground Clearance:	5.8 in
Fuel Tank Capacity:	7 gallons

OPTIONS COMING:

- Tele Boom
- Enclosed Cab
- Hydraulic Actuated Mini Style Attachment Plate

(Coming 2022)

HAS HIGH STANDARDS

More value with more standard features including suspension seat, 2" hitch receiver, and traction control, just to name a few